

Dual Soft Heat® Brewer with Docking System

Features

Coffee brewers with portable servers

- Variable batch selector allows you to brew ½, 1, or 1½ gallon (1.9, 3.8 or 5.7 litre) batches.
- Patented server heat control automatically shuts off once target temperature is reached. Can be set to 175°–190°F (79.4–87.8°C).
- Electronic grinder interface instructs grinder on exact amount of coffee for selected brew batch size.
- Master on/off switch.
- Safety-Fresh® patented brew-through lid with vapor seal and spill prevention.
- Holds two SH servers (sold separately).
- Remote 1 or 2 server docking stations for additional satellite coffee serving. (sold separately)
- Brew capacity varies by model. See back for details.



Dual SH with SH Servers

(servers sold separately)

Dimensions: 35.8" H x 18" W x 20.5"D
(91cm H x 45.7cm W x 52.1cm D)

For current specification sheets and other information, go to www.bunn.com.

International models may vary in appearance.

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004



Single/Dual Filter Pack
Product No. : 20138.0000



SH Server



Easy Clear® EQHP-10L
Product No. : 39000.0001

Two Position Drip Tray
Product No.: 27150.0000



2SH Stand



Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Shipping Weight	Cord Attached	Agency
Dual SH Brewer	27900.0006	230	26.9	2@3031	6200	17.3 gal./hr. (71.5 L/hr)	89 lbs. (40.4 kg)	No	CE
Dual SH Brewer	27900.0037	220	25.5	2@3031	5600	17.3 gal./hr. (71.5 L/hr)	92 lbs. (41.7 kg)	No	UL


Note: Soft Heat® Brewers and Servers are sold, boxed and shipped separately. All brewers have mechanical thermostats.

Brewing capacity: based upon incoming water temp of 60°F/15.5°C (140°F/60°C rise) per 1/2 gallon (1.89 L) brew time of 4 minutes.

Electrical: 230 volt model requires 2-wires plus ground service rated 220-240V, single phase, 50/60Hz.

220 volt model requires 2 wires plus ground service rated 220-240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" male fitting.

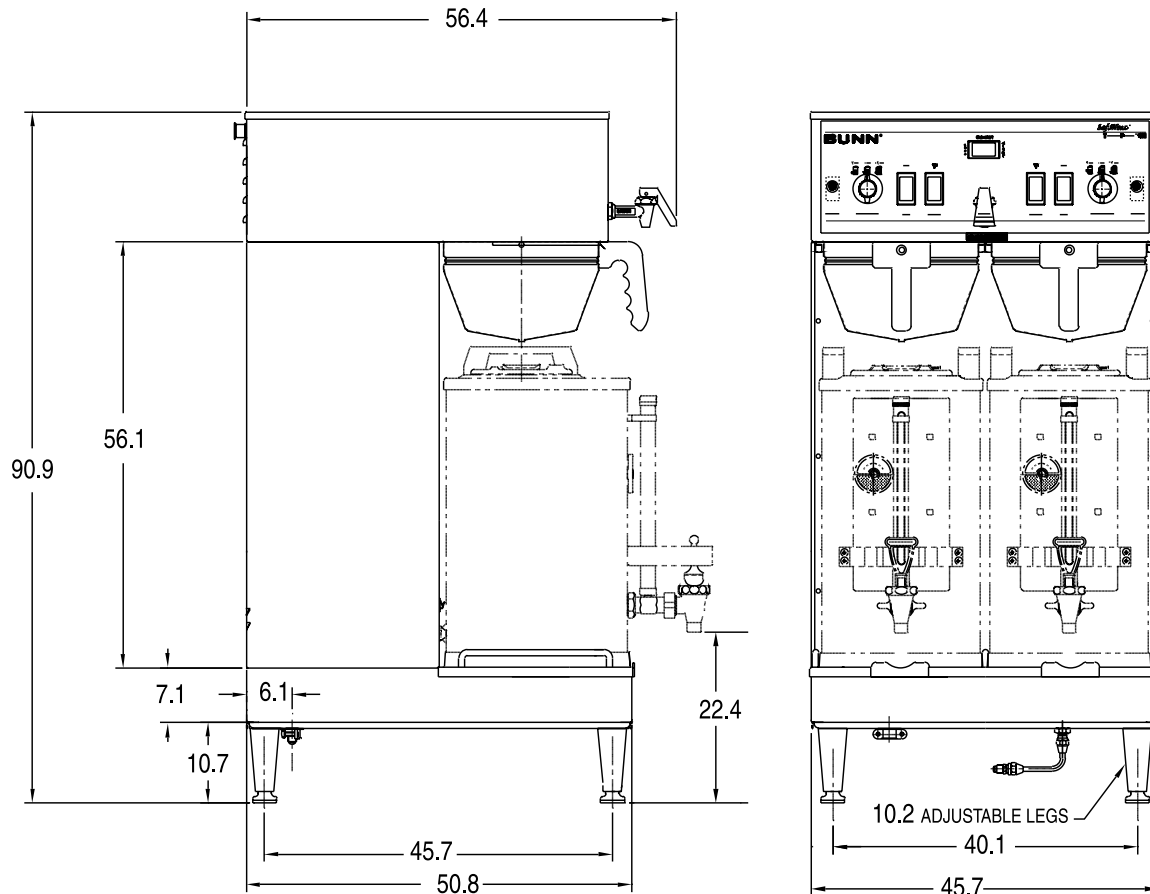

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.