

## Titan<sup>™</sup> Dual Brewer

ITEM#

PROJECT

DATE

### Features



#### Titan Dual Brewer

- Brews 26.3 gallons (100 litres) of perfect coffee per hour.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- BrewMETER<sup>™</sup> allows automatic programming of pulse routine.
- SplashGard<sup>®</sup> funnel and funnel locks help improve safety.
- Funnel has 28 ounce (.8 litre) capacity and paper filter retainers to eliminate fold-over.
- ThermoFresh<sup>®</sup> servers are insulated to keep coffee hot and fresh for hours.
- Left or right faucet for hot water.
- CE approved.
- RoHS compliant.
- 3-Phase or Single-Phase operation.

#### Model Titan Dual Brewer with 3 gallon (11.36 litres) TF Servers *(servers sold separately)*

Dimensions: 40.02" H x 35.63" W x 21.74" D  
*(101.7cm H x 90.5cm W x 55.2cm D)*

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

### Related Products

**Easy Clear<sup>®</sup> EQHP-54**  
Product No. : 39000.0006



**Easy Clear<sup>®</sup> EQHP-54L**  
Product No. : 39000.0003

**Titan/Urn Filter Pack**  
Product No. : 20111.0000  
Packed per case: 250  
Dimensions:  
20" Base x 8" Sidewall  
50.8 cm Base x 20.3 cm Sidewall



**Titan TF Server**  
Product No.: 39400.0000  
3 gallon (11.36 litres),  
Mechanical Gauge



**Titan Funnel**  
Product No.: 40105.0000  
*(boxed)*



## Dimensions & Specifications



| Model      | Product #  | Volts                | Amps | Total Watts | Brewing Capacity          | Shipping Weight       | Funnel Locks | Cord Attached | Agency |
|------------|------------|----------------------|------|-------------|---------------------------|-----------------------|--------------|---------------|--------|
| Titan Dual | 39200.0002 | 230/400<br>(3-phase) | 16   | 11125       | 31.8 gal/hr<br>(120 l/hr) | 148 lbs.<br>(67.1 kg) | Yes          | No            | CE     |
|            |            | 230*<br>(1-phase)    | 33.5 | 8000        | 21.3 gal/hr<br>(80 l/hr)  |                       |              |               |        |

**Brewing capacity:** based upon incoming water temp of 15°C (78°C rise).

\*Brewer can easily be rewired in the field for single-phase operation.

Electrical: Brewer is 4-wires plus ground service rated 230/400V, 3-phase, 50/60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 3/8" male flare fitting, and back-flow prevention.  
4 gal/min (15.2 l/min) requirement.

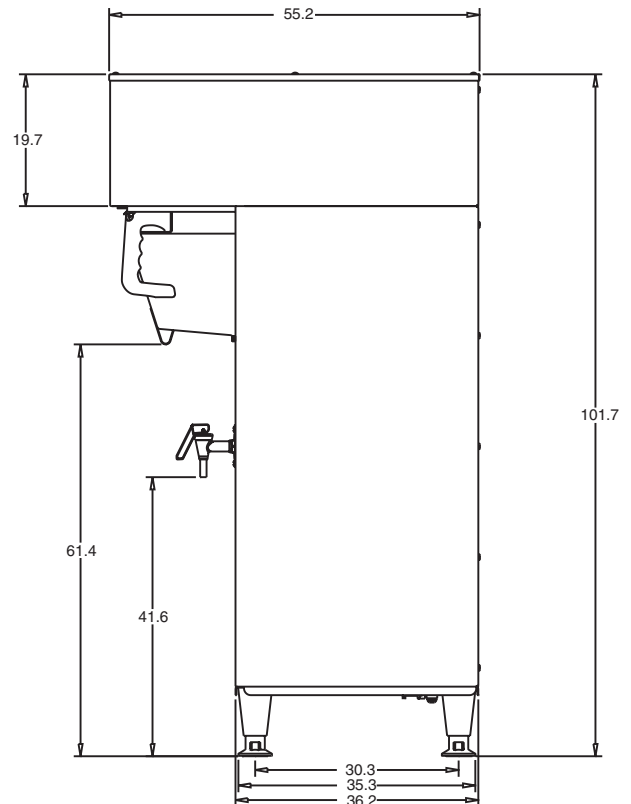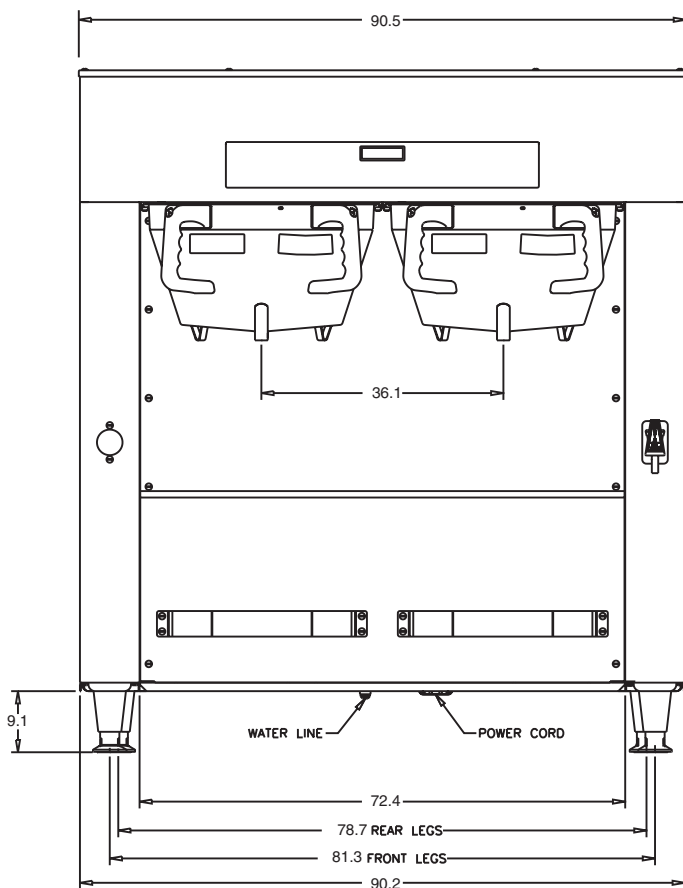

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

3/08 © Bunn-O-Matic Corporation